

the **dependable** way to extend your Sky Digibox™

SATLINK™


TV-402 Sky Digibox™ CAT5 extender

remote screen & audio up to 300m

- simple plug-n-play installation
- no power supply needed
- no infrared transmitter needed
- works with all makes of Sky decoder
- sub-miniature transmitter and receiver
- units plug directly into the rear of the satellite decoder and the TV – no unsightly boxes are visible
- full stereo audio unlike mono only with coax extenders
- improved signal quality as no additional signal modulation is carried out
- uses inexpensive CAT5 twisted-pair cabling

applications

- suitable for home, office and corporate installations

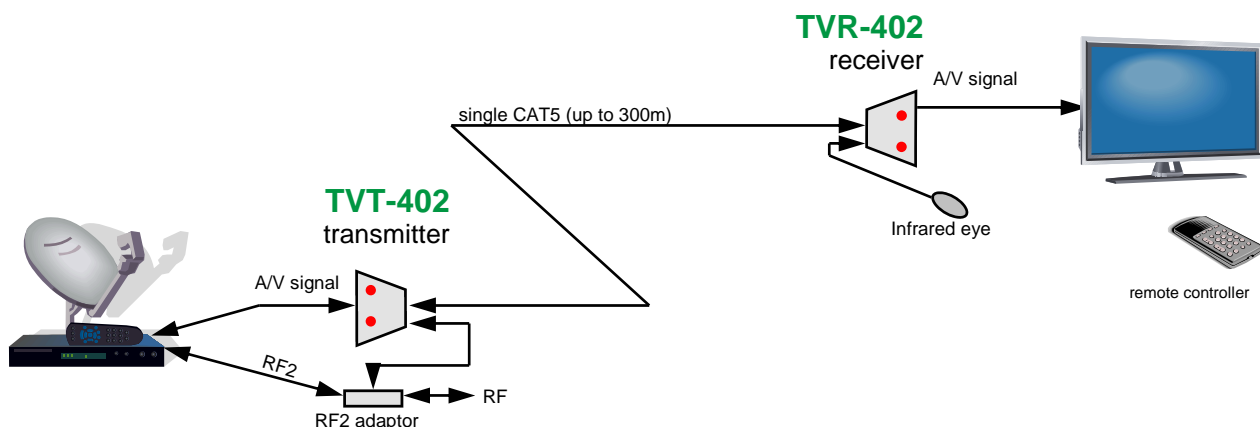

Satellite decoder

The transmitter, RF2 adaptor and receiver are shown separated from the satellite decoder and TV for interconnection clarity. They do however, plug directly into the rear connectors of the satellite decoder and TV, and are not visible from normal viewing positions.

SaLiNK™ - TV-402

making Digibox extension easy

simple true plug-n-play, no alignments or adjustments are necessary – just connect the units, follow a few simple satellite set-ups and switch on.

pin-sharp Studio Systems' broadcast expertise ensures the sharpest pictures – even with up to 300m of cat 5 cable.

compatibility the **SaLiNK-TV-402** range is fully compatible with your existing structured cabling, including patching panels.

multi-user the **SaLiNK-TV-402** will shortly be available in a rack mount format, for larger corporate installations.

TVT-402



TVR-402



SPECIFICATION

CONNECTORS

Audio/video Link Scart RJ45

INDICATORS

Power present: Red LED
Data present: Red LED (flashing)

PERFORMANCE

(Measured using 100m link cable length)

Video (composite)

Bandwidth: 5MHz (3dB)
I/P Impedance: 75ohm
O/P Impedance: 75ohm
Level: 1.0Vp-p (typical)

Audio

Bandwidth: 30Hz – 20kHz (3dB)
I/P Impedance: 10kohm
O/P Impedance: 27ohm
Level: 5Vp-p Maximum
Gain: Unity

POWER (drawn from digibox RF2)

Voltage: +9V d.c.
Current: 60mA

ENVIRONMENTAL

Operating Temp. 0-45°C
Storage Temp. -20°C to +70°C
Relative Humidity: 0-90% non-condensing

PHYSICAL

Dimensions: 59 x 50 x 19 (each unit)
(mm) including connectors

Weight: 40g (each unit)

ORDERING INFORMATION

SaLiNK TV-402 System, comprising: -

TVT-402 transmitter
TVR-402 receiver
Infrared eye
RF2 adaptor